


POS 900 Series



The POS 900 is a 15inch touch screen POS system equipped with Intel ATOM 1.6 GHz processor. It supports diversified applications with the choice of MSR or VFD customer display. Also, its various ports including two front USB ports, makes the model compatible with numerous devices. POS 900 stylish and slim design fits very well into any limited counter space in retail, restaurant and hospitality sector. The robust structure in aluminium die cast base features makes it capable to withstand daily usage under harsh operating environments.

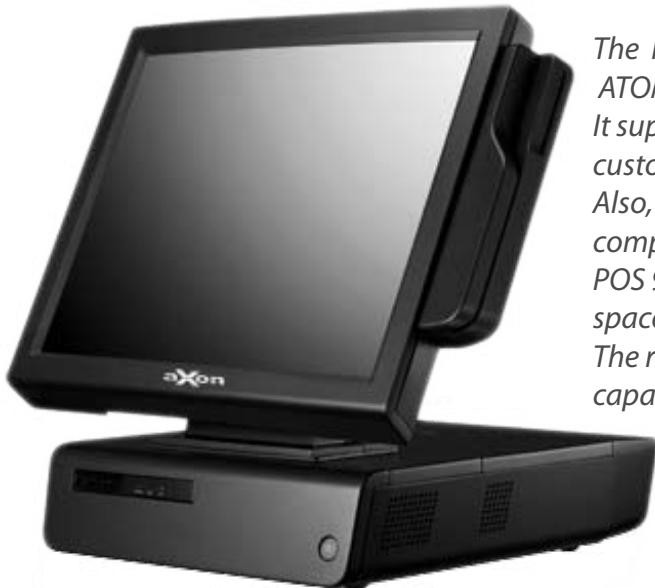

Features



- 1
- 2
- 3

1. Flexible Angle Adjustment to provide optimal visual comfort
 Swivet : 0° ~ 180°
 Tilt : 0° ~ 80°

**3. Magnetic card Reader
 Smart Card Reader**

2. Customer Display
 VFD
 20 columns x 2 lines

POS PC Serie P900

A full range of Intel based POS PC providing complete features for POS application



Specification

Model Name	P09-5A16-B
Motherboard	
CPU	Intel® ATOM 330 1.6 GHz Dual Core
Chipset	Intel® ATOM 945GC / ICH7
System Memory	1 x DDR2 DIMM Slot Up to 2GB (Default 512MB)
Graphic Memory	Intel® Graphics Media Accelerator (System Memory Shared)
LCD Panel	
LCD Size	15" TFT
Brightness	250 cd / m ²
Maximal Resolution	1024 x 768
Touch Screen Type	Resistive
Tilt Angle	
Storage	
HDD	1 x 2.5" slim HDD bay (default 120GB)
Flash Memory	
Expansion	
External I/O	
USB 2.0	3x USB Rear / 2x USB Front
Serial / COM	3x COM ports RS-232 connectors (COM 1, COM 2 & COM3 pin 9 with 5V or 12V power by jumper)
Parallel	1 x DB 25F
LAN (10 / 100)	1 x RJ45 - Gigabit LAN
2 nd VGA	
Cash Drawer	
Audio	1 x Line-in / 1 x Line-out/1x Mic
Control / Indicator	
Power Button	1
LED Indicator	1
Power	
Power Adapter	Internal AC 110 ~ 220 (Max 230Watt)
Peripheral	
Customer Display	VFD / LCD Pole Display
Second Display	
Magnetic Card Reader	2 or 3 Tracks Support
Programmable Keypad / Card Reader	
Environment	
EMC & Safety	FCC Class A / CE Marking / LVD
Operating Temperature	5°C ~ 35°C (41°F ~ 95°F)
Storage Temperature	-20°C ~ 55°C (-4°F ~ 131°F)
Operating Humidity	20% - 80% RH non-condensing
Storage Humidity	20% - 85% RH non-condensing
Dimension (W x D x H)	
OS Support	Windows 2000, Windows XP, Windows XP Embedded, WEPOS, Linux

Marchi e denominazioni appartengono ai loro rispettivi proprietari



AXON Computer

Via Taliercio, 7/A
30030 - Gardigiano di Scorzè (VE)
Italy
Tel: +39.041.5830594
Fax: +39.041.5830595
E-mail: info@axoncomputer.it
www.axoncomputer.it

Direzione Commerciale

Via Napoli, 125 - c/o Centro Commerciale Meridiana - 80013 Casalnuovo (NA) - Tel. +39.081.3176051